





- g Tested
- Pb-free Lead Plating
 - Halogen-free and RoHS-compliant

D (O N)_ ion] 65 S	9Value
650	V
3.5	V
17.4	A
169	m
5.2	J

DFN8080-4L	4	H65R190A	1	-55 to 150	13-inch Reel	3000
------------	---	----------	---	------------	--------------	------

Drain-to-Source Voltage	V _{DS}	650	V
Gate-to-Source Voltage	V _{GS}	30	V
			A
	I _{DM}		A
	I _{AS}		A
	E _{AS}		mJ
(4)T _C = 25 Å C	P _D	156	
	T _J		

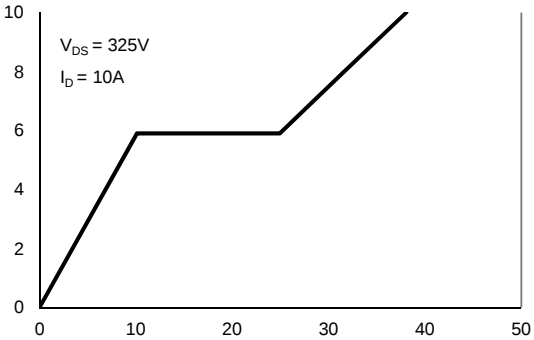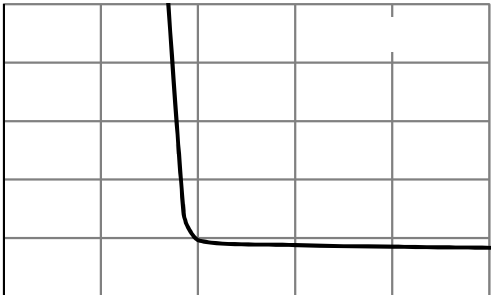



Gate Threshold Voltage	$V_{(BR)DSS}$	650			V
	I_{DSS}	$V_{DS} = 650V, V_{GS} = 0V$		1.0	A
	I_{GSS}			±100	nA
	$V_{GS(th)}$	2.5	3.5	4.5	V
	$R_{DS(ON)}$		169	190	m
	V_{SD}		0.75	1.0	V
	I_S			156	A



C_{ISS}	1560	pF
C_{OSS}		





